

Prompt: ① When setting the operating time period, the shutdown time cannot be earlier than the startup time; ② If the operating time period needs to span 00:00, it needs to be set in two separate time periods.


MAINTENANCE

If the diffuser is not used for a long time, 95% industrial alcohol should be added into the oil bottle to clean the nozzle and other parts inside the diffuser. Tip: Maintain the diffuser with 95% industrial alcohol at least every 1-2 months.

Specific operation: add 95% industrial alcohol into the empty bottle, turn on the diffuser and run for 10-15 minutes after, then turn off the diffuser and pour the alcohol, then screw back the bottle to machine.

REPLACING THE NOZZLE

1. To change the nozzle, unplug the diffuser, remove the bottle of oil and carefully pull out the clear tube. Gently pull out the black nozzle by wiggling it gently using a pair of tweezers.
2. Replace it with a new nozzle and ensure the nozzle is pressed very firmly into the top of the diffuser. The tube can be reinserted into the nozzle.

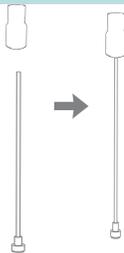

TECHNICAL FEATURES

Size: 110×110×285mm	Weight: 1.1Kg
Voltage: DC 12V	Power: 5W
Coverage: 200m ³	Oil bottle capacity: 120ml

WHAT'S INCLUDED

Scent diffuser×1, Adapter×1, Bottle×1, Atomization core×1, Manual×1

WARRANTY


- 1.The Warranty is suitable for new machine but not reselled or second hand products.
- 2.Within 12 months after purchase date, Warranty is offered for all qualified machines. During warranty,we will offer repair services and the free parts but not include essential oil.
- 3.The warranty card & purchase Invoice are needed if after-sales service is required. Please contact us within warranty if any problems.
- 4.The following is not suitable for warranty service:
 - ① Damage & problems caused by Accidents & Fire.
 - ② Not used properly and wrong operation.
 - ③ Repaired by the unprofessional and cause some parts damaged.
 - ④ Damaged during transportation.
 - ⑤ Without our warranty card.
 - ⑥ Without proper cleaning for a long time
 - ⑦ The machine work time out.
 - ⑧ Machines & Parts not from us.
 - ⑨ Machines not purchased from official sales channels.
 - ⑩ Send the machines back without permit from manufacturer.

NOTICE

- 1.Please carefully read the Instruction before installation, and keep the User manual to check if need at anytime
- 2.Please make sure the machine stays upright ,no leaking and no down; or may damage the device and parts
- 3.Please do not open the machine by yourself, If problems, please contact us promptly.

SMART TOWER SCENT DIFFUSER

INSTRUCTION MANUAL

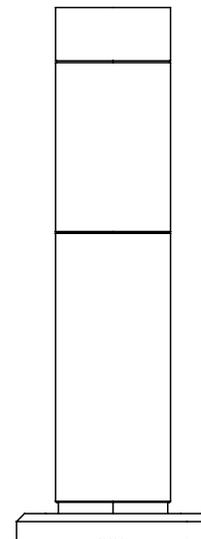


Please read the manual carefully and keep it properly before use

Please read carefully before use and keep it properly.

We supply warranty within 12 months after purchase date for all qualified machines.

INSTALLATION

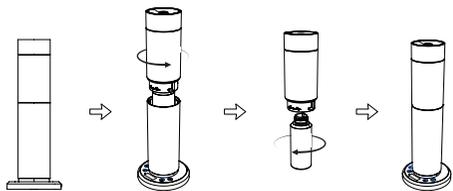

- ▶ Hold the lower part of the device. Gently twist the upper part in the direction indicated by the arrow to open the atomizer head upwards. Unscrew the essential oil bottle, add the essential oil, and then screw the bottle back on tightly. Please ensure proper alignment and avoid any tilting.
- ▶ Align the marked area on the upper part with the display screen and reattach it to the lower part of the device, then tighten it.
- ▶ After connecting the power, the device will start working. Press the touch button to adjust the concentration and set the timer.

BUTTON

[MODE] Work cycle selection, 5-segment working period timing, on/off cycling function, restore factory settings

[SET] Time setting, day of the week setting, Touch control keys lock

[UP] Increase

[DOWN] Decrease

Restore factory settings: Long press [MODE] for 5 seconds, the device will beep twice in a low tone as a prompt.

Key lock: Long press [SET] for 3 seconds to lock the touch keys, the device will beep once in a low tone as a prompt. Press and hold for 3 seconds again to unlock.

BLUETOOTH SETTING:

▶ Home

Mobile phone scan code to download and install "Scent Tech", start the APP, complete the beginner's guide, select Bluetooth mode to enter the home page, at this time the available devices column displays the available Bluetooth devices that have been plugged in within the Bluetooth range, click to select the available devices to enter the status page.



Prompt: Configure APP permissions, including location services, Bluetooth connection, and sending notifications, as required.

▶ Status page

- Status window: Displays the current working mode parameters and status, including time, day, Bluetooth connection status, etc.

- Operation status: the mobile phone can turn on/off the device operation with one button;

- Working Mode: Displays the currently running working mode

- Device Address: After the device is successfully configured with the network, the network location address is obtained.

- Click More in the top right corner: Rename device.


▶ Mode settings

Click the working mode bar to enter the mode setting, you can set 5 groups of working modes respectively, click any mode bar to customize the day, timing power on and off time period, concentration setting, etc. After the settings are completed, you can turn on/off any specific mode with a single button press.

SYSTEM TIME SETTING

▶ Firstly to press [SET], the LCD display showed "hours" figure will flash, then press [UP/DOWN] to adjust hour.

▶ Press [SET] at second time.

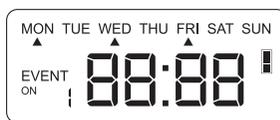

Hour adjustment finished. The minutes figure will flash, then press [UP/DOWN] to adjust the minutes.

▶ Press [SET] at the third time, Minutes adjustment finished. The indicated date will flash, press [UP/DOWN] to adjust the current date.

Finally press [SET] at fourth time, Setting finished.

TOUCH CONTROL KEY SETTINGS (SINGLE PRESS)

▶ Press the [MODE] key for the first time, the LCD display shows the factory-set time, and the machine can set 5 working time periods. Example: Set 08:00-10:00, 11:00-12:00, and 13:00-14:00. Over 00:00, just set two time periods, such as the first time period 08:00-23:59, the second time period 00:01-06:00.

▶ First time to press [SET] key for the first time to enter the working clock setting for the first period of time, the hour start period number flashes, press the [UP/DOWN] key to adjust the hour start time; press the [SET] key the second time, the hour start period After setting, the number of minute start period will flash, press [UP/DOWN] key to adjust the start period of minutes; press the [SET] key for the third time, the minute start period is set, the group number flashes when the week matches, single press [UP] The key displays the symbol ▲ on the LCD screen to select the working weekday, and then press again to not display that means it is not selected, and then press [DOWN] to continue setting other weekday combinations.

▶ Second time to press [MODE], the LCD display will show [EVENT 1 OFF] means the PAUSE TIME of first group. Then, press [SET] to do the program setting. Press [UP/DOWN] to adjust hours, minutes.

▶ Press the [MODE] key for the third time to set the device working time. Press [UP/DOWN] key to adjust the working time, select the appropriate time, The adjustable range is 5 to 300 seconds.

▶ Press the [MODE] key for the fourth time to set the device pause time. Press [UP/DOWN] key to adjust the pause time, select the appropriate time, The adjustable range is 5 to 300 seconds.

After setting, you can set next mode as needed, and you can continue to press [MODE] to return to the LCD home page if you don't need.